

HAMMOND *SKX* UPDATING SYSTEM

① PREPARATION


You have downloaded the update from the official Hammond website and are now ready to do the update. Take the time to read this instruction first.

The update has to be performed using a USB Flash drive. It is best to use a fresh USB Flash drive and keep it only for use with your SKX.

To prepare the USB Flash drive for use with the SKX, please insert the USB Flash drive in the USB port at the back of the SKX while the instrument is ON.

In the display you will read "Confirming USB. Please wait". If this message is disappeared the USB Flash drive is prepared for use with the SKX and the correct folder is made on the USB Flash drive.

② COPY THE "SYS" FILES TO THE USB FLASH

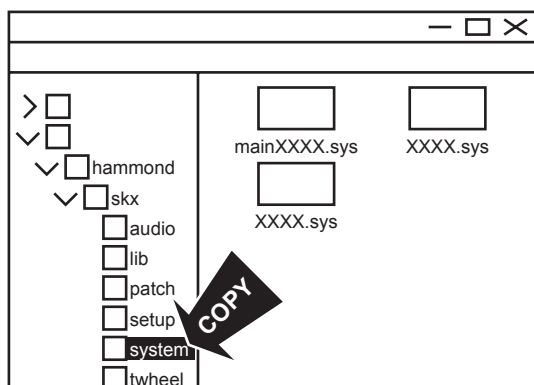


After downloading the update from the Hammond Website the files may still be compressed or zipped in your computer. If so, decompress or unzip it. You will see several files with different extension like .txt or .pdf. .txt files describe the changes in the software after the update and .pdf contains the instructions. For the update you will only need the .sys files.

If you do not see extensions correct your computer to "show extensions".

Insert the USB Flash drive in your computer.


Copy the .sys files to the "system" folder of the USB Flash drive (see picture above). So do not copy the files just anywhere on the USB Flash drive, but **only** in the "system" - folder.

③ INSERT THE USB FLASH DRIVE

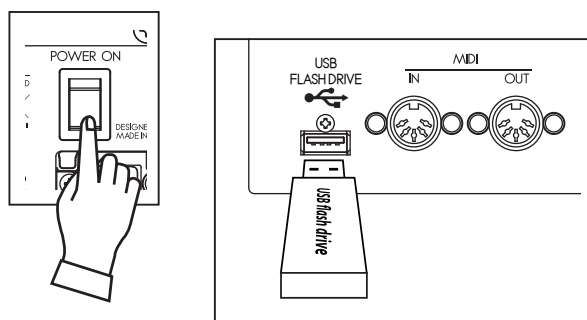

Turn the power to the SKX "OFF", and insert the USB Flash drive to the USB FLASH DRIVE port.

④ ENTER THE SYSTEM LOAD MODE

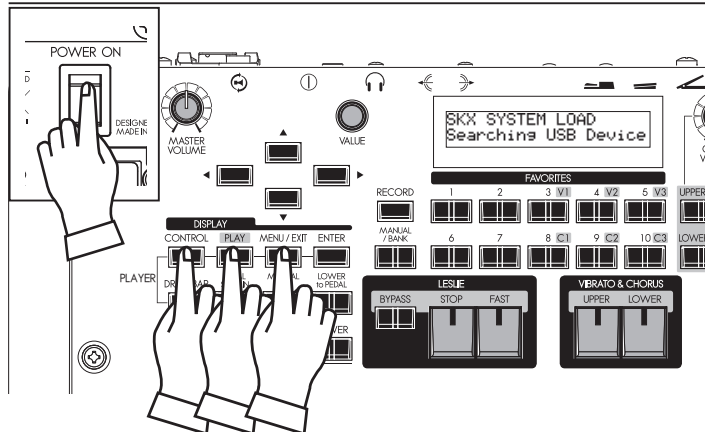

Turn the power to the SKX "ON" with pressing [CONTROL], [PLAY] and [MENU/EXIT] buttons. The display will show "SKX SYSTEM LOAD"

If instead of "SKX SYSTEM LOAD" the display shows "NO SYSTEM FILES", the update is not performed and there are 2 possibilities.

1. The update files are not in the correct "system" folder.
2. The update files are older or the same as the software already running in the SKX, so there is no need to update.

⑤ UPDATE BEGINS

lmainxxxx.sj00200020
MAIN 00000000 Wr..

The status of the updating operation is displayed while it is in process.

⑥ UPDATE FINISHED

Please Power off
Completed!!!

The updating process is completed when "Please Power off" is displayed.

Once turn off the power and switch on again, the unit will start up with the updated system software.

HAMMOND *Skx* システムを更新する

① USBメモリーを準備する


当社公式サイトよりアップデータをダウンロードしアップデートの準備ができましたら、この手引書をお読みください。

SKXのアップデートを行うにはUSBメモリーを使用します。これは新品を用意しSKX専用とするのが最良です。

USBメモリーの使用準備をするには、SKXの電源が入っている状態でUSBメモリーを背面のUSB端子へ挿入します。

ディスプレイにメッセージ“Confirming USB. Please wait”が表示されます。このメッセージが消えると、USBメモリー内にSKXで使用するためのフォルダーが作られ、準備完了です。

② SYSファイルをコピーする

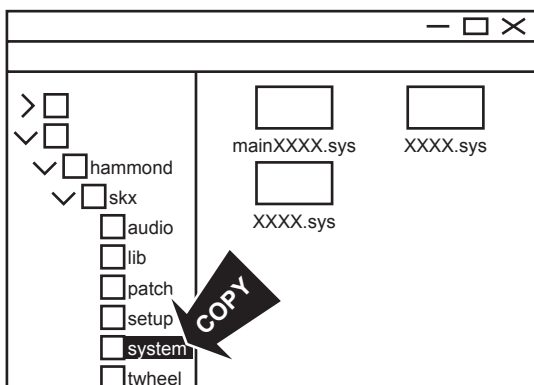


当社公式サイトよりアップデータをコンピュータにダウンロードすると、zip圧縮されていることがあります。この場合は「展開」を行ってください。すると複数のファイル例えば、“.txt”、“.pdf”といった異なる拡張子のものも見られます。“.txt”ファイルは変更履歴を、“.pdf”ファイルは説明を含んでいます。アップデートに必要なのは“.sys”ファイルのみです。

拡張子が見えない場合は、コンピュータを「拡張子を表示する」設定にしてください。

USBメモリーをコンピュータに挿入します。


“.sys”ファイルを、USBメモリーの“system”フォルダーにコピーします。USBメモリー内の“system”以外のフォルダーにはコピーしないでください。

③ USBメモリーを挿入する

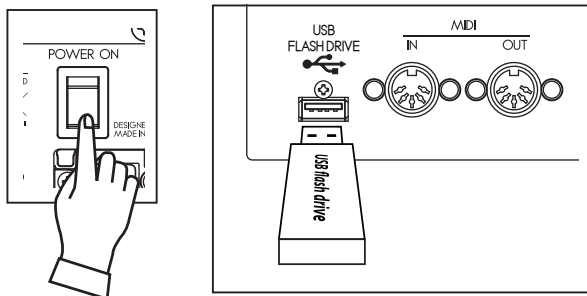

SKXの電源スイッチを切り、USBメモリーをUSB FLASH DRIVE ジャックに挿入します。

④ システムロード機能に入る

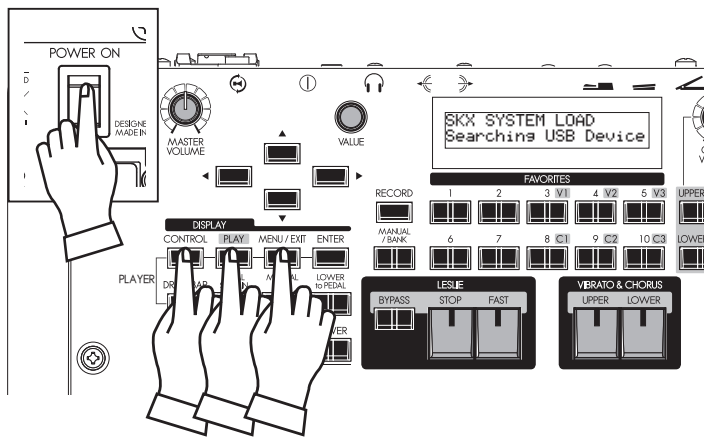

[CONTROL] [PLAY] [MENU/EXIT]の3ボタンを押したままSKXの電源を入れます。ディスプレイには“SKX SYSTEM LOAD”が表示されます。

“SKX SYSTEM LOAD”ではなく“NO SYSTEM FILES”が表示される場合は、以下2つの場合が考えられます。

1. ファイルが正しく“system”フォルダーにコピーされていない。
2. SKXのソフトウェアが既に最新版であり、アップデート作業が不要である。

⑤ 更新開始

[mainxxxx.s]00200020
MAIN 00000000 Wr..

更新作業中は、ディスプレイに進捗状況が表示されます。

⑥ 更新完了

Please Power off
Completed!!!

“Please Power off”が表示されたら更新完了です。

電源スイッチを一旦切って入れ直すと、更新されたシステム・ソフトウェアで本機が起動します。